



MARKING SYSTEM ACCESSORIES

To complete, enhance and protect the installation of MARKINGenius®, PLOTSYSTEM and RINGcablesys identification and labelling media, select the appropriate transparent holders for cable tags, push button legend bases to fit the leading brands, legend mounting rail, marker plate and legend strip covers. Some holders are available in Halogen free material type ...-HF.



PMF

PMF holders are specifically designed to accommodate pairs of appropriately sized cables.

Material Standard: plasticised PVC, self extinguishing to class V0 (UL94), free of Cadmium, Lead, Silicon and Teflon. Resistant to alkali, alcohol, acid and many solvents

⚡ Temperature range:
 • -40°C to +90°C
 • -40°F to +194°F


Material Halogen free:
 Copolymer EVA, self extinguishing to class HB (UL 94)

| Use with: | page |
|--------------------------|------|
| MG-TPMF cable tags, 4mm | 8 |
| TPM-ROLL cable tags, 4mm | 31 |

Note: Use PMF holders only with designated cable tags of the same length.

TRANSPARENT HOLDERS for serieFLAT cable tags MG-TPMF



| PMF-00 | Cable ext. Ø range 1,3 ÷ 2,2mm (0.05 ÷ 0.08 in.) Cable c.s.a range 0,25 ÷ 0,5mm ² (26 ÷ 20 AWG) | Length mm | Standard | Halogen free | Quantity | System | System |
|---|---|-----------|----------|--------------|----------|--------|--------|
| | | | | | | System | System |
|  | | 10 | 90000 | 90000-HF | 8.000 | ● | ● |
| | | 12 | 90010 | 90010-HF | 7.000 | ● | ● |
| | | 15 | 90020 | 90020-HF | 6.000 | ● | ● |
| | | 20 | 90040 | 90040-HF | 4.000 | ● | ● |
| | | 30 | 90070 | | 2.000 | ● | ● |
| | | 40 | 90090 | | 5.000 | ● | ● |
| PMF-01 | Cable ext. Ø range 2 ÷ 3,7mm (0.07 ÷ 0.14 in.) Cable c.s.a range 0,5 ÷ 2,5mm ² (20 ÷ 13 AWG) | 10 | 90100 | 90100-HF | 6.000 | ● | ● |
| | | 12 | 90110 | 90110-HF | 5.000 | ● | ● |
| | | 15 | 90120 | 90120-HF | 4.000 | ● | ● |
| | | 20 | 90140 | 90140-HF | 3.000 | ● | ● |
| | | 30 | 90170 | | 2.000 | ● | ● |
| | | 40 | 90190 | | 1.000 | ● | ● |
| PMF-02 | Cable ext. Ø range 3,4 ÷ 4,3mm (0.13 ÷ 0.16 in.) Cable c.s.a range 2,5 ÷ 4mm ² (13 ÷ 11 AWG) | 10 | 90200 | 90200-HF | 4.000 | ● | ● |
| | | 12 | 90210 | 90210-HF | 4.000 | ● | ● |
| | | 15 | 90220 | 90220-HF | 3.000 | ● | ● |
| | | 20 | 90240 | 90240-HF | 2.000 | ● | ● |
| | | 30 | 90270 | | 1.000 | ● | ● |
| | | 40 | 90290 | | 1.000 | ● | ● |
| PMF-03 | Cable ext. Ø range 4 ÷ 6,3mm (0.15 ÷ 0.24 in.) Cable c.s.a range 4 ÷ 10mm ² (11 ÷ 7 AWG) | 10 | 90300 | 90300-HF | 3.000 | ● | ● |
| | | 12 | 90310 | 90310-HF | 2.000 | ● | ● |
| | | 15 | 90320 | 90320-HF | 2.000 | ● | ● |
| | | 20 | 90340 | 90340-HF | 1.000 | ● | ● |
| | | 30 | 90370 | | 1.000 | ● | ● |
| | | 40 | 90390 | | 1.000 | ● | ● |
| PMF-04 | Cable ext. Ø range 6 ÷ 10mm (0.23 ÷ 0.39 in.) Cable c.s.a range 10 ÷ 25mm ² (7 ÷ 3 AWG) | 10 | 90400 | | 2.000 | ● | ● |
| | | 12 | 90410 | | 1.000 | ● | ● |
| | | 15 | 90420 | | 1.000 | ● | ● |
| | | 20 | 90440 | | 500 | ● | ● |
| | | 30 | 90470 | | 500 | ● | ● |
| | | 40 | 90490 | | 500 | ● | ● |
| PMF-05 | Cable ext. Ø range 9 ÷ 15mm (0.35 ÷ 0.59 in.) Cable c.s.a range 25 ÷ 70mm ² (3 ÷ 2/0 AWG) | 10 | 90500 | | 500 | ● | ● |
| | | 12 | 90510 | | 500 | ● | ● |
| | | 15 | 90520 | | 250 | ● | ● |
| | | 20 | 90540 | | 250 | ● | ● |
| | | 30 | 90570 | | 150 | ● | ● |
| | | 40 | 90590 | | 100 | ● | ● |
| PMF-06 | Cable ext. Ø range 14 ÷ 26mm (0.55 ÷ 1.02 in.) Cable c.s.a range 70 ÷ 240mm ² (2/0 AWG ÷ 500 MCM) | 10 | 90600 | | 500 | ● | ● |
| | | 12 | 90610 | | 250 | ● | ● |
| | | 15 | 90620 | | 250 | ● | ● |
| | | 20 | 90640 | | 100 | ● | ● |
| | | 30 | 90670 | | 100 | ● | ● |
| | | 40 | 90690 | | 100 | ● | ● |

It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format. Holders can be produced in other lengths on request.

PM

TRANSPARENT HOLDERS

for cables tags MG-TPM, TPM and markers PMP-30



PM holders are profiled to allow each type to accommodate a range of cable sizes.

Material Standard: plasticised PVC, self extinguishing to class V0 (UL94), free of Cadmium, Lead, Silicon and Teflon. Resistant to alkali, alcohol, acid and many solvents

⚡ Temperature range:
 • -40°C to +90°C
 • -40°F to +194°F

Material Halogen free:
 Copolymer EVA, self extinguishing to class HB (UL 94)

| Use with: | page |
|------------------|------|
| MG-TPM tags, 4mm | 8 |
| TPM tags, 4mm | 42 |
| PMP-30 markers | 54 |

Note: Use PM holders only with designated cable tags of the same length.

PM-00

Cable ext. Ø range 1,3 ÷ 2,2mm (0.05 ÷ 0.08 in.)
 Cable c.s.a range 0,25 ÷ 0,5mm² (26 ÷ 20 AWG)



| Length mm | Code | Halogen free | Quantity | System | Plotter | Manual |
|-----------|-------|--------------|----------|--------|---------|--------|
| 10 | 50000 | | 8.000 | ● | ● | ● |
| 10 | 50002 | 50002-HF | 2.000 | ● | ● | ● |
| 12 | 50010 | | 7.000 | | ● | ● |
| 12 | 50012 | 50012-HF | 2.000 | | ● | ● |
| 15 | 50020 | | 6.000 | ● | ● | ● |
| 15 | 50022 | 50022-HF | 2.000 | ● | ● | ● |
| 18 | 50032 | | 1.000 | | ● | ● |
| 21 | 50042 | | 1.000 | | | ● |
| 23 | 50052 | | 1.000 | | ● | ● |
| 27 | 50062 | | 1.000 | | ● | ● |
| 30 | 50072 | | 500 | | ● | ● |
| 1.000 | 50080 | | 10 | ● | ● | ● |

PM-01

Cable ext. Ø range 2 ÷ 3,7mm (0.07 ÷ 0.14 in.)
 Cable c.s.a range 0,5 ÷ 2,5mm² (20 ÷ 13 AWG)



| | | | | | | |
|------|-------|----------|-------|---|---|---|
| 10 | 50100 | | 6.000 | ● | ● | ● |
| 10 | 50102 | 50102-HF | 2.000 | ● | ● | ● |
| 12 | 50110 | | 5.000 | | ● | ● |
| 12 | 50112 | 50112-HF | 1.000 | | ● | ● |
| 15 | 50120 | | 4.000 | ● | ● | ● |
| 15 | 50122 | 50122-HF | 1.000 | ● | ● | ● |
| 18 | 50130 | | 3.000 | | ● | ● |
| 21 | 50140 | | 3.000 | | | ● |
| 23 | 50150 | | 2.000 | | ● | ● |
| 27 | 50160 | | 2.000 | | ● | ● |
| 30 | 50170 | | 1.000 | | ● | ● |
| 1000 | 50180 | | 10 | ● | ● | ● |

PM-02

Cable ext. Ø range 3,5 ÷ 4,3mm (0.13 ÷ 0.16 in.)
 Cable c.s.a range 2,5 ÷ 4mm² (13 ÷ 11 AWG)



| | | | | | | |
|-------|-------|----------|-------|---|---|---|
| 10 | 50200 | | 4.000 | ● | ● | ● |
| 10 | 50202 | 50202-HF | 1.000 | ● | ● | ● |
| 12 | 50210 | | 4.000 | | ● | ● |
| 12 | 50212 | 50212-HF | 1.000 | | ● | ● |
| 15 | 50220 | | 3.000 | ● | ● | ● |
| 15 | 50222 | 50222-HF | 1.000 | ● | ● | ● |
| 18 | 50230 | | 2.000 | | ● | ● |
| 21 | 50240 | | 2.000 | | | ● |
| 23 | 50250 | | 2.000 | | ● | ● |
| 27 | 50260 | | 1.000 | | ● | ● |
| 30 | 50270 | | 1.000 | | ● | ● |
| 1.000 | 50280 | | 10 | ● | ● | ● |

PM-03

Cable ext. Ø range 4 ÷ 6,3mm (0.15 ÷ 0.24 in.)
 Cable c.s.a range 4 ÷ 10mm² (11 ÷ 7 AWG)



| | | | | | | |
|-------|-------|----------|-------|---|---|---|
| 10 | 50300 | | 3.000 | ● | ● | ● |
| 10 | 50302 | 50302-HF | 1.000 | ● | ● | ● |
| 12 | 50310 | | 2.000 | | ● | ● |
| 12 | 50312 | 50312-HF | 500 | | ● | ● |
| 15 | 50320 | | 2.000 | ● | ● | ● |
| 15 | 50322 | 50322-HF | 500 | ● | ● | ● |
| 18 | 50330 | | 1.000 | | ● | ● |
| 21 | 50340 | | 1.000 | | | ● |
| 23 | 50350 | | 1.000 | | ● | ● |
| 27 | 50360 | | 1.000 | | ● | ● |
| 30 | 50370 | | 500 | | ● | ● |
| 1.000 | 50380 | | 10 | ● | ● | ● |

It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format. Holders can be produced in other lengths on request.

Note: Use PM holders only with designated cable tags of the same length.

PM-04

Cable ext. Ø range 6 ÷ 10mm (0.23 ÷ 0.39 AWG)

Cable c.s.a range 10 ÷ 25mm² (7 ÷ 3 AWG)



| Length mm | Code | Halogen free | Quantity | System | PLOT SYSTEM Plotter | MANUAL Manual |
|-----------|-------|--------------|----------|--------|---------------------|---------------|
| 10 | 50400 | | 2.000 | ● | ● | ● |
| 10 | 50402 | | 500 | ● | ● | ● |
| 12 | 50410 | | 1.000 | | ● | ● |
| 12 | 50411 | | 500 | | ● | ● |
| 15 | 50420 | | 1.000 | ● | ● | ● |
| 15 | 50421 | | 500 | ● | ● | ● |
| 18 | 50430 | | 1.000 | | ● | ● |
| 21 | 50440 | | 500 | | | ● |
| 23 | 50450 | | 500 | | ● | ● |
| 27 | 50460 | | 500 | | ● | ● |
| 30 | 50470 | | 500 | | ● | ● |
| 1.000 | 50480 | | 10 | ● | ● | ● |

PM-05

Cable ext. Ø range 9 ÷ 15mm (0.35 ÷ 0.59 AWG)

Cable c.s.a range 25 ÷ 70mm² (3 ÷ 2/0 AWG)



| | | | | | | |
|-------|-------|--|-----|---|---|---|
| 10 | 50500 | | 500 | ● | ● | ● |
| 12 | 50510 | | 500 | | ● | ● |
| 15 | 50521 | | 250 | ● | ● | ● |
| 18 | 50530 | | 250 | | ● | ● |
| 21 | 50540 | | 250 | | | ● |
| 23 | 50550 | | 250 | | ● | ● |
| 27 | 50560 | | 250 | | ● | ● |
| 30 | 50570 | | 250 | | ● | ● |
| 1.000 | 50580 | | 10 | ● | ● | ● |

PM-06

Cable ext. Ø range 14 ÷ 26mm (0.55 ÷ 1.02 AWG)

Cable c.s.a range 70 ÷ 240mm² (2/0 AWG ÷ 500 MCM)



| | | | | | | |
|-------|-------|--|-----|---|---|---|
| 10 | 50600 | | 500 | ● | ● | ● |
| 12 | 50610 | | 250 | | ● | ● |
| 15 | 50620 | | 250 | ● | ● | ● |
| 18 | 50630 | | 250 | | ● | ● |
| 21 | 50640 | | 100 | | | ● |
| 23 | 50650 | | 100 | | ● | ● |
| 27 | 50660 | | 100 | | ● | ● |
| 30 | 50670 | | 100 | | ● | ● |
| 1.000 | 50680 | | 10 | ● | ● | ● |

It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format. Holders can be produced in other lengths on request.

PM-L

PM-L holders are thinner than PM versions and specifically designed to accommodate pairs of appropriately sized cables.

Material: plasticised PVC, self extinguishing to class VO (UL 94), free of Cadmium, Lead, Silicon and Teflon. Resistant to alkali, alcohol, acid and many solvents

Temperature range:
 -40°C to +90°C
 -40°F to +194°F

| | |
|------------------|------|
| Use with: | page |
| MG-TPM tags, 4mm | 8 |
| TPM tags, 4mm | 42 |
| PMP-30 markers | 54 |

Note: Use PM holders only with designated cable tags of the same length.



TRANSPARENT HOLDERS

light version for cable tags
 MG-TPM, TPM and markers PMP-30

PM-01L

1 Cable ext. Ø range 2,1 ÷ 3,5mm (0.08 ÷ 0.13 in.)
 Cable c.s.a range 0,5 ÷ 2,5mm² (20 ÷ 13 AWG)



2 Cables c.s.a range 0,25 ÷ 0,75mm² (23 ÷ 18 AWG)

| Length mm | Code | Quantity | System | Plotter | Manual |
|-----------|-------|----------|--------|---------|--------|
| 10 | 10100 | 6.000 | ● | ● | ● |
| 12 | 10110 | 5.000 | ● | ● | ● |
| 15 | 10120 | 4.000 | ● | ● | ● |
| 18 | 10130 | 3.000 | ● | ● | ● |
| 21 | 10140 | 3.000 | ● | ● | ● |
| 23 | 10150 | 2.000 | ● | ● | ● |
| 27 | 10160 | 2.000 | ● | ● | ● |
| 30 | 10170 | 1.000 | ● | ● | ● |
| 1.000 | 10180 | 10 | ● | ● | ● |

PM-02L

1 Cable ext. Ø range 2,6 ÷ 4,2mm (0.10 ÷ 0.16 in.)
 Cable c.s.a range 1 ÷ 4mm² (17 ÷ 11 AWG)



2 Cables c.s.a range 0,5 ÷ 1mm² (20 ÷ 17 AWG)

| Length mm | Code | Quantity | System | Plotter | Manual |
|-----------|-------|----------|--------|---------|--------|
| 10 | 10200 | 4.000 | ● | ● | ● |
| 12 | 10210 | 4.000 | ● | ● | ● |
| 15 | 10220 | 3.000 | ● | ● | ● |
| 18 | 10230 | 2.000 | ● | ● | ● |
| 21 | 10240 | 2.000 | ● | ● | ● |
| 23 | 10250 | 2.000 | ● | ● | ● |
| 27 | 10260 | 1.000 | ● | ● | ● |
| 30 | 10270 | 1.000 | ● | ● | ● |
| 1000 | 10280 | 10 | ● | ● | ● |

It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format. Holders can be produced in other lengths on request.

PMFT

Material: plasticised PVC, self extinguishing to class VO (UL94), free of Cadmium, Lead, Silicon and Teflon. Resistant to alkali, alcohol, acid and many solvents

Temperature range:
 -40°C to +90°C
 -40°F to +194°F

| | |
|----------------------|------|
| Use with: | page |
| MG-TAPW 9mm legends | 17 |
| TAR-ROLL 9mm legends | 32 |
| TAPW 9mm legends | 46 |

Note: Use PMFT holders only with designated legends of the same length.

TRANSPARENT HOLDERS

for 9mm legends MG-TAPW, MG-TAR, TAR-ROLL and TAPW

PMFT-04

Cable ext. Ø range 6 ÷ 10mm (0.23 ÷ 0.39 in.)
 Cable c.s.a range 10 ÷ 25mm² (7 ÷ 3 AWG)



| Length mm | Code | Quantity | System | System | Plotter |
|-----------|-------|----------|--------|--------|---------|
| 35 | 74471 | 400 | ● | ● | ● |
| 70 | 74470 | 200 | ● | ● | ● |

PMFT-05

Cable ext. Ø range 9 ÷ 15mm (0.35 ÷ 0.59 in.)
 Cable c.s.a range 25 ÷ 70mm² (3 ÷ 2/0 AWG)



| Length mm | Code | Quantity | System | System | Plotter |
|-----------|-------|----------|--------|--------|---------|
| 35 | 74571 | 300 | ● | ● | ● |
| 70 | 74570 | 150 | ● | ● | ● |

It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format. Holders can be produced in other lengths on request.

PMF

TRANSPARENT HOLDERS
other mounting formats
for serieFLAT tags MG-TPMF



Material: plasticised PVC, self extinguishing to class V0 (UL 94), free of Cadmium, Lead, Silicon and Teflon. Resistant to alkali, alcohol, acid and many solvents

Temperature range:
-40°C to +90°C
-40°F to +194°F

| Use with: | page |
|--------------------|------|
| MG-TPMF tags, 4mm | 8 |
| TPM-ROLL tags, 4mm | 31 |

Note: Use PMF holders only with designated cable tags of the same length.



PMF-AC Self adhesive for surface mounting

SELF ADHESIVE



| Length mm | Code | Quantity | System | System |
|-----------|--------|----------|--------|--------|
| 10 | 66000N | 5.000 | ● | ● |
| 12 | 66010N | 4.000 | ● | ● |
| 15 | 66020N | 4.000 | ● | ● |
| 20 | 66040N | 4.000 | ● | ● |
| 30 | 66070N | 2.000 | ● | ● |
| 40 | 66090N | 1.000 | ● | ● |

PMF-ET Tie-on (tie width max 6mm) for longitudinal mounting on cables, hoses, tubes and conduit



| | | | | |
|----|----------|-------|---|---|
| 15 | * 63020 | 2.000 | ● | ● |
| 20 | * 63040 | 1.000 | ● | ● |
| 30 | * 63070 | 1.000 | ● | ● |
| 40 | ** 63090 | 500 | ● | ● |

* 1 tie, ** two ties
Purchase cable ties separately

Holders can be produced in other lengths on request.

PM

TRANSPARENT HOLDERS
other mounting formats
for MG-TPM, TPM and PMP-30



Material: plasticised PVC, self extinguishing to class V0 (UL 94), free of Cadmium, Lead, Silicon and Teflon. Resistant to alkali, alcohol, acid and many solvents

Temperature range:
-40°C to +90°C
-40°F to +194°F

| Use with: | page |
|------------------|------|
| MG-TPM tags, 4mm | 8 |
| TPM tags, 4mm | 42 |
| PMP-30 markers | 54 |

Note: Use PM holders only with designated cable tags of the same length.



PM-AC Self adhesive for surface mounting

SELF ADHESIVE



| Length mm | Code | Quantity | System | Plotter | Manual |
|-----------|--------|----------|--------|---------|--------|
| 10 | 51000N | 5.000 | ● | ● | ● |
| 12 | 51010N | 4.000 | ● | ● | ● |
| 15 | 51020N | 4.000 | ● | ● | ● |
| 18 | 51030N | 3.000 | ● | ● | ● |
| 21 | 51040N | 2.000 | ● | ● | ● |
| 23 | 51050N | 2.000 | ● | ● | ● |
| 27 | 51060N | 2.000 | ● | ● | ● |
| 30 | 51070N | 2.000 | ● | ● | ● |
| 1.000 | 51080N | 10 | ● | ● | ● |

PM-ET Tie-on (tie width max 6mm) for longitudinal mounting on cables, hoses, tubes and conduit



| | | | | | |
|----|---------|-------|---|---|---|
| 12 | *53010 | 2.000 | ● | ● | ● |
| 15 | *53020 | 2.000 | ● | ● | ● |
| 18 | *53030 | 1.000 | ● | ● | ● |
| 21 | *53040 | 1.000 | ● | ● | ● |
| 23 | *53050 | 1.000 | ● | ● | ● |
| 27 | *53060 | 1.000 | ● | ● | ● |
| 30 | *53070 | 1.000 | ● | ● | ● |
| 40 | **53090 | 500 | ● | ● | ● |

PM-DT Tie-on (tie width max 4mm) for longitudinal mounting on cables, hoses, tubes and conduit



| | | | | | |
|------|-------|-------|---|---|---|
| 10 | 55000 | 7.000 | ● | ● | ● |
| 12 | 55010 | 6.000 | ● | ● | ● |
| 15 | 55020 | 5.000 | ● | ● | ● |
| 18 | 55030 | 3.000 | ● | ● | ● |
| 21 | 55040 | 3.000 | ● | ● | ● |
| 23 | 55050 | 3.000 | ● | ● | ● |
| 27 | 55060 | 2.000 | ● | ● | ● |
| 30 | 55070 | 2.000 | ● | ● | ● |
| 1000 | 55080 | 10 | ● | ● | ● |

* 1 tie, ** two ties
Purchase cable ties separately

Holders can be produced in other lengths on request.

PMT

Material: plasticised PVC, self extinguishing to class V0 (UL94), free of Cadmium, Lead, Silicon and Teflon. Resistant to alkali, alcohol, acid and many solvents

⚡ Temperature range:
 • -40°C to +90°C
 • -40°F to +194°F

| | |
|----------------------|------|
| Use with: | page |
| MG-TAP legends, 15mm | 16 |
| TAP legends, 15mm | 46 |

Note: Use PMT holders only with designated legends of the same length.



TRANSPARENT HOLDERS other mounting formats for 15mm and 9mm legends



PMT-AC Self adhesive for surface mounting of 15mm legends

SELF ADHESIVE



| Length mm | Code | Quantity | System | Plotter |
|-----------|--------|----------|--------|---------|
| 17 | 59002N | 500 | ● | ● |
| 27 | 59010N | 1.000 | ● | ● |
| 49 | 59020N | 500 | ● | ● |
| 67 | 59030N | 250 | ● | ● |
| 1.000 | 59060N | 10 | ● | ● |

PMT-ET Tie on (tie width max 6mm) for longitudinal mounting on cables, hoses, tubes and conduit of 15mm legends



| | | | | |
|----|---------|-----|---|---|
| 17 | *54000 | 500 | ● | ● |
| 27 | *54010 | 500 | ● | ● |
| 49 | **54020 | 250 | ● | ● |
| 67 | **54030 | 250 | ● | ● |

PMT-DT Tie on (tie width max 14,5mm) for longitudinal mounting on cables, hoses, tubes and conduit of 15mm legends



| | | | | |
|-------|-------|-----|---|---|
| 17 | 60002 | 500 | ● | ● |
| 27 | 60012 | 500 | ● | ● |
| 49 | 60020 | 250 | ● | ● |
| 67 | 60030 | 500 | ● | ● |
| 1.000 | 60060 | 10 | ● | ● |

*1 tie, **two ties
Purchase cable ties separately

| | |
|----------------------|------|
| Use with: | page |
| MG-TAPW legends, 9mm | 17 |
| TAPW legends, 9mm | 46 |



PMT-AC Self adhesive for surface mounting of 9mm legends

SELF ADHESIVE



| Length mm | Code | Quantity | System | Plotter |
|-----------|--------|----------|--------|---------|
| 20 | 59042N | 500 | ● | ● |
| 35 | 59050N | 500 | ● | ● |
| 1.000 | 59070N | 10 | ● | ● |

PMT-ET Tie-on (tie width max 6mm) for longitudinal mounting on cables, hoses, tubes and conduit of 9mm legends



| | | | | |
|----|---------|-------|---|---|
| 20 | *54040 | 1.000 | ● | ● |
| 35 | **54050 | 500 | ● | ● |

PMT-DT Tie-on (tie width max 8,5mm) for longitudinal mounting on cables, hoses, tubes and conduit of 9mm legends



| | | | | |
|-------|-------|-------|---|---|
| 20 | 60042 | 500 | ● | ● |
| 35 | 60050 | 1.000 | ● | ● |
| 1.000 | 60070 | 10 | ● | ● |

*1 tie, **two ties
Purchase cable ties separately

| | |
|-----------------------|------|
| Use with: | page |
| MG-TAPW legends, 9mm | 17 |
| TAR-ROLL legends, 9mm | 32 |
| TAPW legends, 9mm | 46 |



PMT-CT Tie-on (tie width max 4,6mm) for longitudinal mounting on cables, hoses, tubes and conduit of 9mm legends



| Length mm | Code | For legends | Quantity | System | Plotter |
|-----------|-------|-------------|----------|--------|---------|
| 40 | 54015 | 9x20 | 500 | ● | ● |
| 55 | 54013 | 9x35 | 500 | ● | ● |
| 90 | 54014 | 9x70 | 250 | ● | ● |

Purchase cable ties separately

Holders can be produced in other lengths on request.



G Series

Ideal for securing tie-on tags, labels and holders to electrical wiring, pipes and conduit.

Black ties have a higher UV resistance due to increased Carbon black loading.

G series ties offer rapid installation due to the low friction coefficient of the material and have an angled tongue to facilitate easy introduction into the buckle. Rounded corners for increased safety.

Material: PA6.6 Polyamide, self-extinguishing V2 (UL94)

Humidity absorption:

2.5% (at 50% relative humidity)

Resistant to oils, bases, greases, oil products, chlorinated solvents.

⚡ Temperature range


-40°C to +85°C (continuous)

-40°F to +185°F

-40°C to +120°C (short periods)

-40°F to +248°F

| Use with: | page |
|-----------------------------|------|
| MG-ETF cable&conduit tags | 10 |
| ETF-ROLL cable&conduit tags | 32 |
| PMF-ET legend holders | 75 |
| PM-ET legend holders | 75 |
| PM-DT legend holders | 75 |
| PMT-ET legend holders | 76 |
| PMT-DT legend holders | 76 |
| PMT-CT legend holders | 76 |

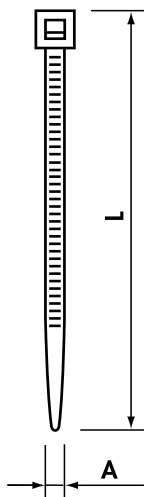

CABLE TIES



Cable ties in PA6.6

| Code ☐ natural | Code ■ black | L (mm) | A (mm) | Max. Bundle Ø (mm) | Min. Loop Tensile Strength (kg) | Quantity |
|-------------------|-----------------|-----------|-----------|-----------------------|------------------------------------|----------|
| G80X2.4 | G80X2.4N | 80 | 2,4 | 15 | 8 | 100 |
| G80X2.4/M | G80X2.4N/M | 80 | 2,4 | 15 | 8 | 1.000 |
| G90X2.4 | G90X2.4N | 90 | 2,4 | 16 | 8 | 100 |
| G100X2.5 | G100X2.5N | 100 | 2,5 | 22 | 8 | 100 |
| G100X2.5/M | G100X2.5N/M | 100 | 2,5 | 22 | 8 | 1.000 |
| G120X2.5 | G120X2.5N | 120 | 2,5 | 30 | 8 | 100 |
| G140X2.5 | G140X2.5N | 140 | 2,5 | 33 | 8 | 100 |
| G140X2.5/M | G140X2.5N/M | 140 | 2,5 | 33 | 8 | 1.000 |
| G160X2.5 | G160X2.5N | 160 | 2,5 | 40 | 8 | 100 |
| G160X2.5/M | G160X2.5N/M | 160 | 2,5 | 40 | 8 | 1.000 |
| G200X2.5 | G200X2.5N | 200 | 2,5 | 53 | 8 | 100 |
| G200X2.5/M | G200X2.5N/M | 200 | 2,5 | 53 | 8 | 1.000 |
| G250X2.8 | G250X2.8N | 250 | 2,8 | 65 | 14 | 100 |
| G300X2.8 | G300X2.8N | 300 | 2,8 | 76 | 14 | 100 |
| G120X3.6 | G120X3.6N | 120 | 3,6 | 30 | 18 | 100 |
| G140X3.6 | G140X3.6N | 140 | 3,6 | 33 | 18 | 100 |
| G140X3.6/M | G140X3.6N/M | 140 | 3,6 | 33 | 18 | 1.000 |
| G150X3.6 | G150X3.6N | 150 | 3,6 | 35 | 18 | 100 |
| G180X3.6 | G180X3.6N | 180 | 3,6 | 44 | 18 | 100 |
| G200X3.6 | G200X3.6N | 200 | 3,6 | 53 | 18 | 100 |
| G200X3.6/M | G200X3.6N/M | 200 | 3,6 | 53 | 18 | 1.000 |
| G250X3.6 | G250X3.6N | 250 | 3,6 | 65 | 18 | 100 |
| G300X3.6 | G300X3.6N | 300 | 3,6 | 76 | 18 | 100 |
| G300X3.6/M | G300X3.6N/M | 300 | 3,6 | 76 | 18 | 1.000 |
| G370X3.6 | G370X3.6N | 370 | 3,6 | 102 | 18 | 100 |
| G120X4.8 | G120X4.8N | 120 | 4,8 | 24 | 22 | 100 |
| G160X4.8 | G160X4.8N | 160 | 4,8 | 38 | 22 | 100 |
| G190X4.8 | G190X4.8N | 190 | 4,8 | 46 | 22 | 100 |
| G190X4.8/M | G190X4.8N/M | 190 | 4,8 | 46 | 22 | 1.000 |
| G200X4.8 | G200X4.8N | 200 | 4,8 | 50 | 22 | 100 |
| G200X4.8/M | G200X4.8N/M | 200 | 4,8 | 50 | 22 | 1.000 |
| G250X4.8/M | G250X4.8N/M | 250 | 4,8 | 60 | 22 | 1.000 |
| G250X4.8 | G250X4.8N | 250 | 4,8 | 60 | 22 | 100 |
| G280X4.8 | G280X4.8N | 280 | 4,8 | 70 | 22 | 100 |
| G300X4.8 | G300X4.8N | 300 | 4,8 | 76 | 22 | 100 |
| G370X4.8 | G370X4.8N | 370 | 4,8 | 102 | 22 | 100 |
| G390X4.8 | G390X4.8N | 390 | 4,8 | 105 | 22 | 100 |
| G430X4.8 | G430X4.8N | 430 | 4,8 | 110 | 22 | 100 |
| G450X4.8 | G450X4.8N | 450 | 4,8 | 116 | 22 | 100 |
| G530X4.8 | G530X4.8N | 530 | 4,8 | 140 | 22 | 100 |
| G150X7.6 | G150X7.6N | 150 | 7,6 | 33 | 55 | 100 |
| G200X7.6 | G200X7.6N | 200 | 7,6 | 50 | 55 | 100 |
| G250X7.6 | G250X7.6N | 250 | 7,6 | 65 | 55 | 100 |
| G300X7.6 | G300X7.6N | 300 | 7,6 | 76 | 55 | 100 |
| G370X7.6 | G370X7.6N | 370 | 7,6 | 102 | 55 | 100 |
| G430X7.6 | G430X7.6N | 430 | 7,6 | 125 | 55 | 100 |
| G530X7.6 | G530X7.6N | 530 | 7,6 | 140 | 55 | 100 |
| G430X9.0 | G430X9.0N | 430 | 9,0 | 110 | 80 | 100 |
| G530X9.0 | G530X9.0N | 530 | 9,0 | 140 | 80 | 100 |
| G710X9.0 | G710X9.0N | 710 | 9,0 | 190 | 80 | 100 |
| G780X9.0 | G780X9.0N | 780 | 9,0 | 228 | 80 | 100 |
| G830X9.0 | G830X9.0N | 830 | 9,0 | 239 | 80 | 100 |
| G920X9.0 | G920X9.0N | 920 | 9,0 | 263 | 80 | 100 |
| G1020X9.0 | G1020X9.0N | 1020 | 9,0 | 295 | 80 | 100 |
| G1220X9.0 | G1220X9.0N | 1220 | 9,0 | 365 | 80 | 100 |
| G230X12.6 | G230X12.6N | 230 | 12,6 | 50 | 115 | 100 |
| G380X12.6 | G380X12.6N | 380 | 12,6 | 106 | 115 | 100 |
| G480X12.6 | G480X12.6N | 480 | 12,6 | 120 | 115 | 100 |
| G580X12.6 | G580X12.6N | 580 | 12,6 | 152 | 115 | 100 |
| G730X12.6 | G730X12.6N | 730 | 12,6 | 204 | 115 | 100 |
| G880X12.6 | G880X12.6N | 880 | 12,6 | 248 | 115 | 100 |
| G1030X12.6 | G1030X12.6N | 1030 | 12,6 | 295 | 115 | 100 |

Minimum order: 1.000 pcs.

Minimum order: 100 pcs.

G Series VO

Material: PA6.6 Polyamide, self-extinguishing VO (UL94)

Humidity absorption:

2.5% (at 50% relative humidity)

Resistant to oils, bases, greases, oil products, chlorinated solvents.

⚡ Temperature range

-40°C to +85°C (continuous)

-40°F to +185°F

-40°C to +120°C (short periods)

-40°F to +248°F

| Use with: | page |
|-----------------------------|------|
| MG-ETF cable&conduit tags | 10 |
| ETF-ROLL cable&conduit tags | 32 |
| PMF-ET legend holders | 75 |
| PM-ET legend holders | 75 |
| PM-DT legend holders | 75 |
| PMT-ET legend holders | 76 |
| PMT-DT legend holders | 76 |
| PMT-CT legend holders | 76 |

CABLE TIES

Cable ties in PA6.6 - VO (UL94)

| Colour | Code | L (mm) | A (mm) | Max. Bundle Ø (mm) | Min. Loop Tensile Strength (kg) | Quantity | Minimum Qty |
|-----------|----------------------|--------|--------|--------------------|---------------------------------|----------|-------------|
| ☐ natural | G90X2.4 VO | 90 | 2,4 | 16 | 8 | 100 | 1.000 |
| | G100X2.5/M VO | 100 | 2,5 | 22 | 8 | 1.000 | |
| | G140X2.5/M VO | 140 | 2,5 | 33 | 8 | 1.000 | |
| | G200X2.5/M VO | 200 | 2,5 | 53 | 8 | 1.000 | |
| | G150X3.6 VO | 150 | 3,6 | 35 | 18 | 100 | |
| | G200X4.8/M VO | 200 | 4,8 | 50 | 22 | 1.000 | |
| | G370X4.8 VO | 370 | 4,8 | 102 | 22 | 100 | |
| ☐ natural | G430X4.8 VO | 430 | 4,8 | 110 | 22 | 100 | 100 |
| | G710X9.0 VO | 710 | 9,0 | 190 | 80 | 100 | |



CABLE TIES

GFH Series

Same features as G series.

Quick and easy identification of bundled conductors.

Write on panel with Felt tip pen (see page 41). May also be marked with MG-VYT adhesive PVC film labels.

Material: PA6.6 Polyamide, self-extinguishing V2 (UL94)

Humidity absorption:

2.5% (at 50% relative humidity)

Resistant to oils, bases, greases, oil products, chlorinated solvents.

⚡ Temperature range

-40°C to +85°C (continuous)

-40°F to +185°F


-40°C to +120°C (short periods)

-40°F to +248°F

| Use: | page |
|--------------------|------|
| Directly on cables | |
| Use with: | |
| MG-VYT 8x21mm | 19 |
| MG-VYT 9x20mm | 19 |



| Colour | Code | L (mm) | A (mm) | Max. Bundle Ø (mm) | Min. Loop Tensile Strength (kg) | Quantity |
|----------|--------------------|--------|--------|--------------------|---------------------------------|----------|
| ☐ nature | GFH100X2.5 | 100 | 2,5 | 18 | 8,1 | 100 |
| | GFHT112X2.5 | 112 | 2,5 | 18 | 8,1 | 100 |

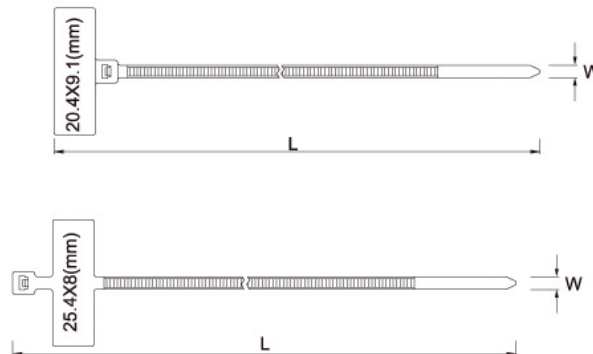

PT

PUSH BUTTON LEGEND BASES

for Ø 22,5mm manual operators



Ø 22.5mm push button legend bases to fit a wide range of popular brands.

Type PTO without locators may offer a higher level of ingress protection depending upon installation method.

All types have a hole behind the legend for rivet fixing, while PT...A types are adhesive backed.

All types can be fitted with a transparent legend cover TAP-CCS 990521 or MG-TAP-CCS 990510

Material: Polycarbonate, self extinguishing to class V2 (UL 94)

- Application temperature
 - + 10°C to + 40°C
 - + 50°F to + 104°F

| Use with: | page |
|-------------------------|------|
| MG-TAP legends, 15x27mm | 16 |
| MG-TAP-CCS covers | 16 |
| TAP legends, 15x27mm | 46 |



SELF ADHESIVE

SELF ADHESIVE

SELF ADHESIVE

SELF ADHESIVE

PTS-22



Size 17x30mm with locators, rivet fixing



| Colour | Code | Quantity | System | Plotter |
|-----------------|-------|----------|--------|---------|
| ■ black | 34002 | 100 | • | • |
| ■ grey RAL 7037 | 34092 | 100 | • | • |
| ■ grey RAL 7032 | 34082 | 100 | • | • |

PTS-24



Size 17x30mm for Telemecanique, rivet fixing

| | | | | |
|---------|-------|-----|---|---|
| ■ black | 68002 | 100 | • | • |
|---------|-------|-----|---|---|

PTO-22



Size 17x30mm without locators, rivet fixing

| | | | | |
|---------|-------|-----|---|---|
| ■ black | 34802 | 100 | • | • |
|---------|-------|-----|---|---|

PTR-22



Size 17x30mm with locators, rounded, rivet fixing

| | | | | |
|-----------------|-------|-----|---|---|
| ■ black | 34102 | 100 | • | • |
| ■ grey RAL 7037 | 34192 | 100 | • | • |
| ■ grey RAL 7032 | 34182 | 100 | • | • |

PTSA-22



Size 17x30mm with locators, self adhesive

| | | | | |
|-----------------|-------|-----|---|---|
| ■ black | 34602 | 100 | • | • |
| ■ grey RAL 7037 | 34692 | 100 | • | • |
| ■ grey RAL 7032 | 34682 | 100 | • | • |

PTSA-24



Size 17x30mm for Telemecanique, self adhesive

| | | | | |
|---------|-------|-----|---|---|
| ■ black | 68602 | 100 | • | • |
|---------|-------|-----|---|---|

PTOA-22



Size 17x30mm without locators, self adhesive

| | | | | |
|---------|-------|-----|---|---|
| ■ black | 34902 | 100 | • | • |
|---------|-------|-----|---|---|

PTRA-22



Size 17x30mm with locators, rounded, self adhesive

| | | | | |
|-----------------|-------|-----|---|---|
| ■ black | 34702 | 100 | • | • |
| ■ grey RAL 7037 | 34792 | 100 | • | • |
| ■ grey RAL 7032 | 34782 | 100 | • | • |

PL

LEGEND BASES
for general purpose applications



PLR legend bases may be fixed to flat surfaces by rivet or in some sizes, by cable tie to tubes, conduits, etc.

PLA versions are self adhesive. TAP-CCS transparent covers may be fitted to protect the legends.

Material: Polycarbonate, self extinguishing to class V2 (UL 94)

Application temperature
+ 10°C to + 40°C
+ 50°F to + 104°F

| | |
|----------------------|------|
| Use with: | page |
| MG-TAP legends, 15mm | 16 |
| TAP legends, 15mm | 46 |



SELF ADHESIVE

PLR Rivet fixing rectangular legend base



| Colour | Size mm | Code | Marker plate size MG-TAP & TAP mm | Quantity | System | Plotter |
|--------------------|---------|--------|-----------------------------------|----------|--------|---------|
| ■ black | 17x20 | 34202 | 15x17 | 100 | ● | ● |
| | 17x30 | 34302 | 15x27 | 100 | ● | ● |
| | 17x52 | *34402 | 15x49 | 100 | ● | ● |
| | 17x70 | *34502 | 15x67 | 100 | ● | ● |
| ■ grey RAL 7037 | 17x20 | 34292 | 15x17 | 100 | ● | ● |
| | 17x30 | 34392 | 15x27 | 100 | ● | ● |
| | 17x52 | *34492 | 15x49 | 100 | ● | ● |
| | 17x70 | *34592 | 15x67 | 100 | ● | ● |
| ■ grey RAL 7032 | 17x20 | 34282 | 15x17 | 100 | ● | ● |
| | 17x30 | 34382 | 15x27 | 100 | ● | ● |
| | 17x52 | *34482 | 15x49 | 100 | ● | ● |
| | 17x70 | *34582 | 15x67 | 100 | ● | ● |

PLA Self adhesive rectangular legend base



| | | | | | | |
|--------------------|-------|--------|-------|-----|---|---|
| ■ black | 17x20 | 35002N | 15x17 | 100 | ● | ● |
| | 17x30 | 35102N | 15x27 | 100 | ● | ● |
| | 17x52 | 35202N | 15x49 | 100 | ● | ● |
| | 17x70 | 35302N | 15x67 | 100 | ● | ● |
| ■ grey RAL 7037 | 17x20 | 35092N | 15x17 | 100 | ● | ● |
| | 17x30 | 35192N | 15x27 | 100 | ● | ● |
| | 17x52 | 35292N | 15x49 | 100 | ● | ● |
| | 17x70 | 35392N | 15x67 | 100 | ● | ● |
| ■ grey RAL 7032 | 17x20 | 35082N | 15x17 | 100 | ● | ● |
| | 17x30 | 35182N | 15x27 | 100 | ● | ● |
| | 17x52 | 35282N | 15x49 | 100 | ● | ● |
| | 17x70 | 35382N | 15x67 | 100 | ● | ● |

*Purchase cable ties separately

TAP-CCS

| | |
|-----------------------------|------|
| Use with: | page |
| PT push button legend bases | 79 |
| PL legend bases | 80 |
| RT legend rails | 81 |

TRANSPARENT COVERS



TAP-CCS



| Size mm | Code | Quantity | System | Plotter |
|---------|--------|----------|--------|---------|
| 15x17 | 990520 | 540 | ● | ● |
| 15x27 | 990521 | 360 | ● | ● |
| 15x49 | 990522 | 180 | ● | ● |
| 15x67 | 990523 | 90 | ● | ● |

CPT

TRANSPARENT COVERS
for marker plates and legend bases



| | |
|-----------------------|------|
| Use with: | page |
| MG-VRT marker plates | 24 |
| MG2-VRT marker plates | 24 |
| VRT marker plates | 51 |

CPT



| Size mm | Code | Marker plate MG-VRT & VRT mm | Quantity | System | Plotter |
|---------|-------|------------------------------|----------|--------|---------|
| 37x79 | 47590 | 32x58 | 10 | ● | ● |
| 47x98 | 47591 | 42x78 | 10 | ● | ● |
| 57x127 | 47592 | 52x107 | 10 | ● | ● |
| 67x109 | 47594 | 62x88 | 10 | ● | ● |
| 97x140 | 47593 | 92x120 | 10 | ● | ● |
| 108x160 | 47595 | 102x138 | 10 | ● | ● |

RT

LEGEND RAIL & PROTECTIVE COVERS



Legend rails provide an alternative to direct marking on components.

Material: Rigid dielectric high-impact PVC.

Lead-free, self extinguishing according to class V2 (UL94), resistant to acid, alcohol, solvents.

Non-deformable up to 70°C (158°F)

Application temperature
+ 10°C to + 40°C
+ 50°F to + 104°F

SELF ADHESIVE

| Use with: | page |
|----------------------------------|------|
| MG-TAP legends, 15mm | 16 |
| MG-17.5 modular legends | 22 |
| STRIP-ROLL modular legend strips | 32 |
| TAP legends, 15mm | 46 |
| VRT 17.5 modular legends | 50 |

| Use with: | page |
|--------------------------------|------|
| MG-TAPW legends, 9mm | 17 |
| TAR-ROLL modular legend strips | 32 |
| TAPW legends, 9mm | 46 |

RTR-TAP

Pre-drilled rail for 15mm legends



| Colour | Length mm | Code | Quantity | System | System | Plotter |
|---------|-----------|--------|----------|--------|--------|---------|
| ■ black | 430 | 990454 | 25 | ● | ● | ● |
| | 650 | 990664 | 25 | ● | ● | ● |
| | 1.000 | 990524 | 25 | ● | ● | ● |
| ■ grey | 430 | 990452 | 25 | ● | ● | ● |
| | 650 | 990662 | 25 | ● | ● | ● |
| | 1.000 | 990502 | 25 | ● | ● | ● |

RTA-TAP

Self adhesive rail for 15mm legends



| | | | | | | |
|---------|-------|---------|----|---|---|---|
| ■ black | 430 | 990455N | 25 | ● | ● | ● |
| | 650 | 990665N | 25 | ● | ● | ● |
| | 1.000 | 990525N | 25 | ● | ● | ● |
| ■ grey | 430 | 990453N | 25 | ● | ● | ● |
| | 650 | 990663N | 25 | ● | ● | ● |
| | 1.000 | 990503N | 25 | ● | ● | ● |

RT-CCP

Protective cover for 15mm legend rail



| | | | | | | |
|---------------|-------|--------|----|---|---|---|
| □ transparent | 430 | 990456 | 25 | ● | ● | ● |
| | 650 | 990666 | 25 | ● | ● | ● |
| | 1.000 | 990504 | 25 | ● | ● | ● |

RT-CCPS

Protective strip for 15mm legend rail



| | | | | | | |
|---------------|-------|--------|----|---|---|---|
| □ transparent | 430 | 990457 | 25 | ● | ● | ● |
| | 650 | 990667 | 25 | ● | ● | ● |
| | 1.000 | 990735 | 25 | ● | ● | ● |

RTR-TAPW

Pre-drilled rail for 9mm legends



| Colour | Length mm | Code | Quantity | System | System | Plotter |
|---------|-----------|--------|----------|--------|--------|---------|
| ■ black | 430 | 990654 | 25 | ● | ● | ● |
| | 650 | 990794 | 25 | ● | ● | ● |
| | 1.000 | 990526 | 25 | ● | ● | ● |
| ■ grey | 430 | 990652 | 25 | ● | ● | ● |
| | 650 | 990792 | 25 | ● | ● | ● |
| | 1.000 | 990505 | 25 | ● | ● | ● |

RTA-TAPW

Self adhesive rail for 9mm legends



SELF ADHESIVE

| | | | | | | |
|---------|-------|---------|----|---|---|---|
| ■ black | 430 | 990655N | 25 | ● | ● | ● |
| | 650 | 990795N | 25 | ● | ● | ● |
| | 1.000 | 990527N | 25 | ● | ● | ● |
| ■ grey | 430 | 990653N | 25 | ● | ● | ● |
| | 650 | 990793N | 25 | ● | ● | ● |
| | 1.000 | 990506N | 25 | ● | ● | ● |

RT-CCW

Protective cover for 9mm legend rail



| | | | | | | |
|---------------|-------|--------|----|---|---|---|
| □ transparent | 430 | 990656 | 25 | ● | ● | ● |
| | 650 | 990796 | 25 | ● | ● | ● |
| | 1.000 | 990507 | 25 | ● | ● | ● |

RT-CCWS

Protective strip for 9mm legend rail



| | | | | | | |
|---------------|-------|--------|----|---|---|---|
| □ transparent | 430 | 990657 | 25 | ● | ● | ● |
| | 650 | 990797 | 25 | ● | ● | ● |
| | 1.000 | 990734 | 25 | ● | ● | ● |

TPD

DOCUMENT HOLDER

adhesive and rivet fixing



TPD document holder provides a convenient means of filing wiring schemes, operating manuals, etc in electrical panels or equipment.

Material: Anti shock polystyrene

TPD



| Size AxL mm | Depth mm | Code | Quantity |
|-------------|----------|--------|----------|
| 193x175 | 20 | 420180 | 5 |
| 235x280 | 40 | 420280 | 5 |